

T5



## The Cleaning Professional's Scrubber

- Achieve 100% solution recovery – even on 180 degree turns – with superior squeegee design
- Quietly clean with a true, OSHA-recognized test-standard 67 dBA
- Increase safety with FaST™ foam scrubbing, NFSI-certified to increase floor traction 21%



**FaST**  
Foam Scrubbing Technology

The Safe Scrubbing Alternative®

## Reach a higher level of cleanliness, health, and safety with the new, environmentally-friendly T5.

### Move from cleanliness to sanitization

Reduce scrubber mold and bacteria and ensure the highest level of cleanliness with complete-access Hygenic® tanks.

### Reduce dependency on wasteful cleaning solutions

Use 90% less detergent, and decrease detergent packaging by 80% with FaST foam scrubbing technology.

### Decrease noise levels

Quietly scrub noise-sensitive environments with the T5's true, OSHA-recognized 67 dBA.

### Conserve natural resources

Utilize fill-water up to 90% longer and reduce waste-water up to 70% with FaST technology.



### HIGH PRODUCTIVITY WITH GEL BATTERIES

Achieve up to 4.5 hours of run-time with environmentally-preferable sealed batteries.

### MAXIMIZE FLEXIBILITY AND VERSATILITY

Choose from 24, 28, or 32 in / 600, 700, or 800 mm disk or 26, 32 in / 650, 800 mm cylindrical brushes for scrubbing a variety of spaces and applications.

### GUARANTEE QUALITY ASSURANCE

Lock-in consistent, repeatable cleaning results with exclusive QA Controls™ system.



### NFSI-Certified FaST: The Safe Scrubbing Alternative®

Equip your T5 with optional FaST (Foam-activated Scrubbing Technology) – the first scrubbing system certified high-traction by the National Floor Safety Institute.

FaST foam not only removes existing soil, but also old detergent residues, increasing traction 21% and reducing the risk of slip-and-falls.

Operators are safer – they never handle chemicals thanks to the FaST-PAK® detergent.


Using up to 70% less water, floors dry faster, increasing safety and productivity.

Maximize productivity, cleaning more than 10.74 ft² on just one tablespoon of water with FaST technology.



### Deliver consistent, superior cleaning results with the T5.

Eliminate the need for follow-up passes and non-productive mop-ups with the fully self-adjusting splash skirt that captures 100% of scrub deck overspray.

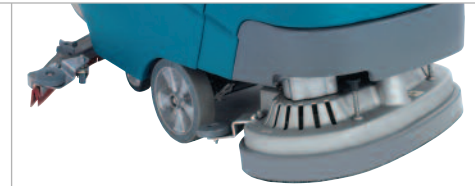

Scrub for up to 150 minutes on a single tank – 90% longer than any other comparable machine – when you equip the T5 with FaST.



Start cleaning faster with 1-STEP™ scrubbing controls – and clean up to 5.5 hours on a single battery charge with T5's economy mode.



Save time and storage space with the on-board charger.



Eliminate operator contact with toxic wastewater and prevent clogged hoses/drains with the convenient debris tray.





## GENUINE TENNANT PARTS, SUPPLIES & SERVICE

### Foam-based FaST: the Key to Peak Productivity and Safety

Using an innovative foam-based detergent delivery system, scrubbers with FaST increase productivity, eliminate the need for operators to handle chemicals, and leave just-cleaned floors virtually dry and safe for traffic.

### Genuine Tennant Parts Advantage

Operate your machine with confidence by choosing genuine Tennant parts. Only authentic Tennant parts are engineered in conjunction with Tennant equipment. For years of worry-free operation, accept only genuine parts and supplies.

### Industry's Only Factory-Direct Service Network

Tennant offers the only factory-trained, locally based network of 400+ service techs dedicated to keeping your cleaning program up and running.

*Choose Tennant Financial for simple, quick financing with flexible upgrade options, and no long-term obligations.*



**Certified by the NFSI, FaST increases floor traction up to 21%.**

## SEEING IS BELIEVING

See for yourself how the T5 scrubber can help you reach a higher standard of cleanliness and safety in your facility. For a demonstration or additional information, call **800.553.8033**.

## T5 WALK-BEHIND FLOOR SCRUBBER

FEATURES	Disk	Cylindrical
<b>Scrubbing System</b>		
Cleaning path	24 in / 600 mm 28 in / 700 mm 32 in / 800 mm	26 in / 650 mm 32 in / 800mm
Solution tank capacity	22.5 gal / 85 L	22.5 gal / 85 L
<b>Productivity (per hour)</b>		
Theoretical max	(24 in) 26,400 ft <sup>2</sup> / 2,500 m <sup>2</sup> (28 in) 30,800 ft <sup>2</sup> / 2,900 m <sup>2</sup> (32 in) 35,200 ft <sup>2</sup> / 3,300 m <sup>2</sup>	(26 in) 28,600 ft <sup>2</sup> / 2,700 m <sup>2</sup> (32 in) 35,200 ft <sup>2</sup> / 3,300 m <sup>2</sup>
Estimated actual* (conventional)	(24 in) 17,875 ft <sup>2</sup> / 1,660 m <sup>2</sup> (28 in) 20,800 ft <sup>2</sup> / 1,900 m <sup>2</sup> (32 in) 24,000 ft <sup>2</sup> / 2,200 m <sup>2</sup>	(26 in) 19,200 ft <sup>2</sup> / 1,790 m <sup>2</sup> (32 in) 24,000 ft <sup>2</sup> / 2,200 m <sup>2</sup>
Estimated actual* (FaST)	(24 in) 20,075 ft <sup>2</sup> / 1,900 m <sup>2</sup> (28 in) 22,750 ft <sup>2</sup> / 2,100 m <sup>2</sup> (32 in) 26,250 ft <sup>2</sup> / 2,400 m <sup>2</sup>	(26 in) 21,000 ft <sup>2</sup> / 2,000 m <sup>2</sup> (32 in) 26,250 ft <sup>2</sup> / 2,400 m <sup>2</sup>
<b>Recovery System</b>		
Scrub motors	(2) 0.75 hp / 0.56 kW	(2) 0.63 hp / 0.47 kW
Scrub motor speed	220 rpm	1500 rpm
Brush/pad down pressure	(3 settings) 40, 80 and 120 lb / 18, 36 and 54 kg	
Recovery tank capacity (includes demisting chamber)	27 gal / 102 L	
Vacuum motor	0.85 hp / 0.64 kW, 3-stage	
Waterlift	62 in / 1,570 mm	
<b>Propelling &amp; Power System</b>		
Propel speed (variable to)		
Transport	2.7 mph / 4.3 km/h	
Scrubbing	2.5 mph / 4.0 km/h	
Batteries – 24 V system (4x 6 V batteries), charger included		
Standard run time**	6 V, 235 Ah / up to 5.5 hours	
Optional gel run time**	6 V, 200 Ah / up to 4.5 hours	
Gradeability (ramp climb)		
Scrubbing/transporting (full)	3.0° / 5.0°	
Trailer ramps (empty)	11°	
<b>Dimensions/Weights</b>		
Product length	(24 in) 52.9 in / 1,340 mm (28 in) 55.7 in / 1,410 mm (32 in) 58.4 in / 1,480 mm	(26 in) 55.4 in / 1,410 mm (32 in) 55.4 in / 1,410 mm
Product width (scrub head)	(24 in) 25.4 in / 640 mm (28 in) 29 in / 740 mm (32 in) 33 in / 840 mm	(26 in) 28 in / 710 mm (32 in) 34 in / 860 mm
Squeegee width	(24 in) 35.7 in / 910 mm (28 in) 41.3 in / 1,050 mm (32 in) 46.6 in / 1,180 mm	(26 in) 41.3 in / 1,050 mm (32 in) 46.6 in / 1,180 mm
Product height	44 in / 1,120 mm	
Product weight (with batteries)	(24 in) 580 lb / 263 kg (28 in) 609 lb / 276 kg (32 in) 621 lb / 282 kg	(26 in) 621 lb / 282 kg (32 in) 629 lb / 285 kg
Sound level*** (operator's ear)	67 dBA	68 dBA
<b>Warranty</b>	3 years / 2,500 hours on parts and labor (excluding batteries). 10 years on rotationally-molded polyethylene tanks.	

\* Estimated coverage rates use the practical speed and empty/fill time standards from the 2004 ISSA Cleaning Times handbook.

\*\* Run times are based on continuous scrubbing run times.

\*\*\* Sound levels per ISO 11201 as recommended by the American Association of Cleaning Equipment manufacturers & OSHA.

**Tennant**  
P.O. Box 1452  
Minneapolis, MN 55440-1452  
800.553.8033  
763.540.1200  
In Quebec: 514.335.6061  
f: 763.513.2112  
www.tennantco.com  
info@tennantco.com