Advance Advolution™2710

Rider Burnisher







A rider burnisher that delivers superior gloss and maximum productivity.





800.440.6723

www.southeasternequipment.net





Advance Advolution™2710

Rider Burnisher

Rider Comfort and Increased Run-Time

The Advolution™ 2710 battery-powered rider burnisher from Advance is designed around a front steering system – accepted industry-wide as being the easiest to control and maneuver. A unique One-Touch™ control pad simplifies operator training and equipment operation. The Advolution 2710 rider burnisher does the rest by automatically monitoring and controlling optimum pad pressure for a consistent, superior gloss every time. A mid-mounted 27 inch burnishing head allows users to easily access the pad retainer.

The Advolution™ 2710 rider burnisher increases operator productivity with its ride-on capability and extended battery run-time. The burnishing pad operates at a speed of 1,600 rpms and utilizes three different pressure settings. On average, battery run-time on this rider burnisher allows the operator to burnish over 30,000 square feet (9,144 meters) per hour. Maximum tested productivity is even higher, with results exceeding 135,000 (41,148 meters) square feet on a single battery charge.


The Advolution 2710 is perfect for daytime burnishing. It operates at 69 dB A, which is the volume level of standard conversation. Battery operation is the clean and quiet alternative to using a propane burnisher.

Operators of the Advolution 2710 rider burnisher can expect uncompromised safety. Open sight lines in front of the machine create a safe and comfortable ride for the operator. Automatic safeguards eliminate unmanned start-ups, which can lead to damaged floor finish. A safety switch prevents accidental pad start-up in the tilt-up position. Passive dust control is standard on the Advolution 2710 rider burnisher, which reduces the need for dust mopping. An active dust control kit is available as an option for environments that require a higher degree of filtration.

Ideal Applications Include —

- Hospitals / Healthcare Facilities
- Commercial Cleaning
- Educational Facilities
- Government Buildings and Installations
- Retail Stores and Malls
- Airports / Train Stations / Bus Depots



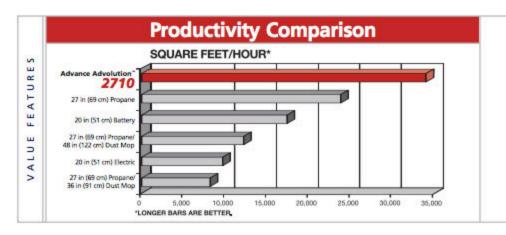





Plug for onboard charger option is easily accessible



Mid-mounted, burnishing head tilts up for access to change burnishing pads quickly and easily



Steering is adjustable to five positions for operator comfort



One-Touch" electronic function controls are conveniently located to keep operation simple and safe.



Rugged construction with durable components assures years of reliable performance.



Easy access to batteries and other components assures minimal downtime.



Low sound level permits operation anywhere, anytime.



FEATURES

ALUE

Simple, one-touch operators button



Equipped with optional accessory kits, the Advolution 2710 becomes multi-functional

800.440.6723 • www.southeasternequipment.net




The Advance Advolution™ 2710 is designed to deliver optimum shine.

Defining Cleaning Innovation...

- Our products are designed using innovative technology that increases productivity and drives down the cost to clean.
- You can get expert service and maintenance for your Advance machines from factory-trained personnel around the world. Fast parts delivery, too.
- Maintain peak performance with Nilfisk Genuine OEM Parts.

O Nilfisk Genuine OEM Parts



Accessories

- Seat Belt
- Dual Armrests
- Onboard Charger Kit

Optional Accessories

- · Active Dust Control Kit
- Headlight Kit
- Battery Watering Kit
- Strobe Light
- Mobile Trash Collector Kit
 *for use with Rubbermaid® BRUTE® 44 container;
 kit does not include container

Technical Specifications

Pad Motor	3.25 hp
Pad Driver	27 in (68.6 cm) flexible pad driver with 3.5 in (9 cm) centering device.
Pad Motor Speed	No load 1,760 RPM / Under load 1,500 RPM
Max Productivity	Per hour: 41,580 ft ² /hr (3,863 m ² /hr)
at 3.5 mph (5.6 km/hr)	Per battery charge: 137,214 ft² (112,748 m²)
Pad Access	Pivoting burnishing head for easy pad access; safety switch prevents
	accidental startup when burnishing head is tilted up.
Pad Pressure Adjustment	Variable between 3 settings; 50-75 lb
	Electronic pad pressure system automatically controls consistency of
	pad pressure to maximize performance based on the setting selected.
Body Construction	All steel chassis and rotational molded body. Steel burnishing head
	linkage and steering column.
Dust Control	Passive dust control standard; active dust control kit
	(3 levels of filtration) optional.
Drive System	1 hp, 700 W permanent magnet motor with gear transmission and non-marking wheel.
	0-4.5 mph (0-7.2 km/hr) transport; 0-3.5 mph (0-5.6 km/hr) burnishing.
	Dynamic speed control plugging service brake.
	Automatic electromechanical parking brake.
Wheels	Two 12 in (30.5 cm) diameter non-marking rear wheels.
Power Source	Six 6 V DC / 395 Ah batteries
Operator Interface	Tilt steering and adjustable seat with deadman safety switch.
Sound Level	69 dB A @ operator position
Minimum Aisle Turn Width	72 inches (183 cm)
Dimensions	Length 65.5 inches (166 cm) Height 54 inches (137 cm) Width 32 inches (91 cm)
Machine Weight	Without batteries 484 lb (220 kg) / With batteries 1,204 lb (546 kg)
Part Numbers	
Advolution™ 2710 w/shelf charger	56422003
Advolution 2710 w/on-board charger	56422004

Specifications are subject to change without notice.



Rubbermaid and BRUTE* used with permission from Rubbermaid* commercial products.





14600 21st Avenue North Plymouth, MN 55447-3408 www.advance-us.com Phone: 800-850-5559 Fax: 800-989-6566 396 Watline Avenue
Mississauga, Ontario, Canada L4Z 1X2
www.nilfisk-advance.com
Phone: 800-668-8400 or 905-712-3260
Fax: 800-263-5111 or 905-712-3255