

T3



## Walk-behind Floor Scrubber

- Just-scrubbed floors immediately dry and safe for traffic with FaST™
- 75% lower sound level (68.5 dBa)
- Easily cleanable, sanitary Hygenic™ solution and recovery tanks



**FaST**  
Foam Scrubbing Technology

The Safe Scrubbing Alternative®



**800.440.6723**  
[www.southeasternequipment.net](http://www.southeasternequipment.net)

## A high-performance scrubber to match your higher standards.

The new T3 scrubber delivers an advanced state of safety and cleanliness with award-winning FaST technology and a sound level 75% quieter than leading competitive models.

### CREATE A CLEAN, SAFE AND HEALTHY ENVIRONMENT

#### Improve environmental health in your facility

Exclusive Hygenic tanks allow for easy access and sanitization, reducing mold, bacteria and other contaminants that can grow in enclosed tanks.

#### Quietly clean in noise-sensitive environments

At only 68.5 decibels, the T3 is 75% quieter than leading competitive models – comparable to normal conversation levels.

#### Leave behind no cleaning solution

Even around 180-degree turns, the T3's equal-pressure, parabolic squeegee recovers all cleaning solution from the floor.



### NFSI-CERTIFIED FaST: THE SAFE SCRUBBING ALTERNATIVE®

Equip your T3 with optional FaST (Foam-activated Scrubbing Technology) – the first and only automatic scrubbing system to receive high-traction certification from the National Floor Safety Institute. With T3 and FaST:

Just-scrubbed floors are dry and safe to walk on immediately because FaST eliminates slippery chemical residue;

Operators are safer – they never handle chemicals thanks to the FaST-PAK™ detergent cartridge;

Use only the detergent you need. FaST accurately measures detergent and water, reducing waste and eliminating chemical residue;

Supercharge your productivity with fewer dump/fill cycles – with FaST, the T3 uses only 1 tablespoon of water to clean more than 10.75 ft<sup>2</sup>.




### ENGINEERED FOR SAFETY

**Minimize the risk of slip-and-fall injuries and help control insurance costs.** Floors are clean, dry and safe for foot traffic almost immediately when scrubbed with FaST.

**Reduce operator fatigue and increase productivity.** Ergonomic design makes cleaning with the T3 more comfortable for your staff.

**Increase scrubbing effectiveness and quality.** Clear sight lines and simple controls mean operators can focus solely on their cleaning environment.

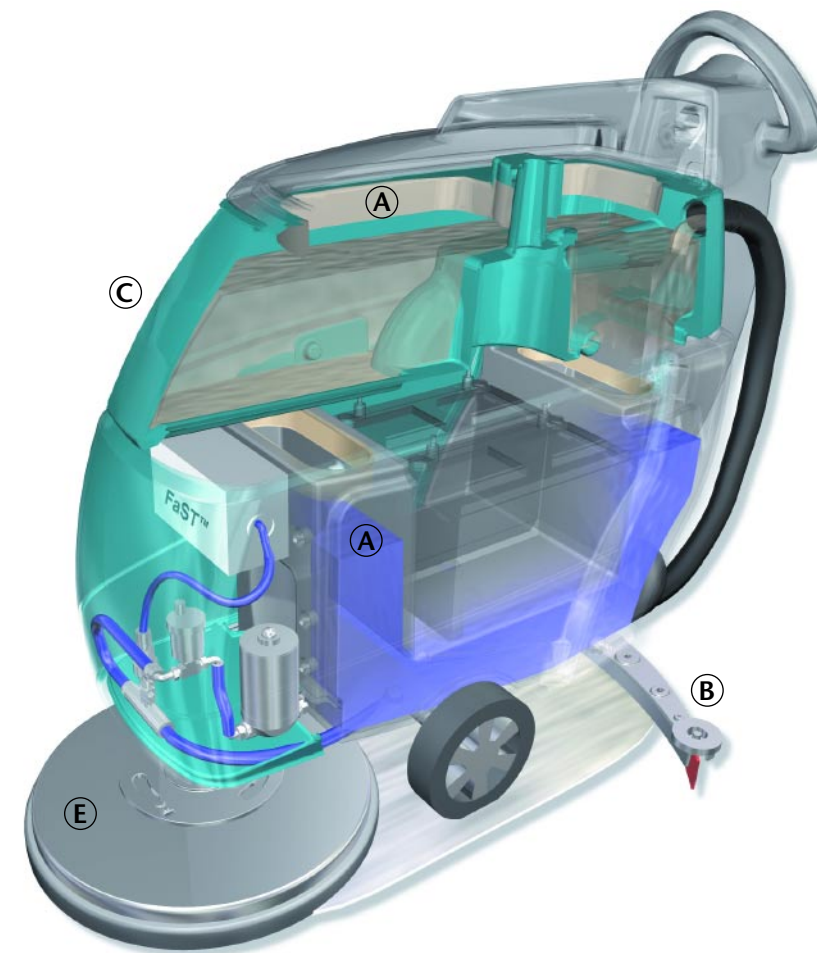

- A Solution and recovery tanks are easily cleanable.** Exclusive Hygenic tanks are fully accessible for sanitization.
- B Quickly remove and replace brushes and squeegees** without tools.
- C Clean tight spaces and narrow aisles** with T3's compact design and highly maneuverable handling.
- D Easily train new operators** to use the simple, intuitive control panel.
- E Operate in noise-sensitive environments.** T3 is a quiet 68.5 decibels.





## FaST-PAK™ CLEANING CONCENTRATE

Easy-to-handle FaST-PAK cartridges are safe to use on a variety of floors, effectively cleaning light-to-heavy soils and grease.

Available in FaST 365 concentrate or 665 heavy duty cleaner/degreaser.

### Tested Safe for Floor Finishes

The nationally-recognized independent testing laboratory, ASPEN, determined that FaST:

- Performs as well as or better than conventional scrubbing;
- Effects on finish gloss are the same as conventional scrubbing.

*For a copy of test results, please call toll-free 800.553.8033.*



FaST is the first and only automatic cleaning system certified by the NFSI to dramatically improve overall floor traction by up to 21%.

## T3 WALK-BEHIND FLOOR SCRUBBER

FEATURES	T3 17-inch Pad Assist	T3 20-inch Pad Assist (20-inch w/Drive)
<b>Productivity (per hour)</b>		
Theoretical Max	20,230 ft <sup>2</sup> /1,880 m <sup>2</sup>	23,800 ft <sup>2</sup> /2,210 m <sup>2</sup>
Estimated Coverage* (Conventional)	8,440 ft <sup>2</sup> /785 m <sup>2</sup>	10,125 ft <sup>2</sup> /940 m <sup>2</sup> (16,065 ft <sup>2</sup> /1,490 m <sup>2</sup> )
Estimated Coverage* (FaST)	11,250 ft <sup>2</sup> /1,045 m <sup>2</sup>	13,500 ft <sup>2</sup> /1,255 m <sup>2</sup> (21,420 ft <sup>2</sup> /1,990 m <sup>2</sup> )
<b>Brush/Pad Drive System</b>		
Cleaning path	17 in/43 cm	20 in/50 cm
Brush motor horsepower	0.75 hp	0.75 hp
Brush RPM	240 RPM @ 40 lbs pressure	240 RPM @ 40 lbs pressure
Brush/pad pressure	45 lbs & 70 lbs	45 lbs & 70 lbs
<b>Solution Delivery System</b>		
Solution tank description	Full access & cleanable	Full access & cleanable
Solution capacity	10.5 gal/40 L	10.5 gal/40 L
<b>Recovery System</b>		
Recovery tank description	Full access & cleanable	Full access & cleanable
Recovery tank capacity	10.5 gal/40 L	10.5 gal/40 L
Vacuum motor	0.5 hp – two stage	0.5 hp – two stage
Vac motor CFM	65 cfm/1.84 cmm	65 cfm/1.84 cmm
Vac motor sealed waterlift	40 in/102 cm	40 in/102 cm
<b>Battery System</b>		
System voltage	24 volt	24 volt
Battery amp hour rating	105 AH @ 20 hr	130 AH @ 20 hr (155 AH @ 20 hr)
Battery run time (continuous cleaning rating)	2.5 hours	2.5 hours (3 hours)
<b>Dimensions/Weights</b>		
Product height	43-in/109 cm	43 in/109 cm
Product length	48 in/123 cm	50.25 in/128 cm
Product width (with squeegee)	30 in/76 cm	30 in/76 cm
Product weight (with batteries)	319 lbs/145 kg	343 lbs/156 kg (391 lbs/177 kg)
<b>Total Power Consumption</b>		
Power consumption amps	27 amp nominal	29 amp nominal (30 amp nominal)
<b>Decibel Rating</b>		
Operator's position	68.5 dBa	68.5 dBa
<b>Warranty</b>		
10/3/3	A minimum of ten (10) years on rotationally molded polyethylene housings and parts free from defects and workmanship under normal use and service. The non-polyethylene parts a three (3) year—or 2,500 hours of operation—warranty under normal use and service. On-site service labor coverage of warranty items for three (3) years.	

*\*Estimated coverage rates use the practical speed and empty/fill time standards from the 2004 ISSA Cleaning Times handbook.*

**800.440.6723**

[www.southeasternequipment.net](http://www.southeasternequipment.net)