


# Captor® & Captor® AXP™ 4300B & 4800B

Battery Rider Sweeper-Scrubbers




[www.southeasternequipment.net](http://www.southeasternequipment.net)

☎ 1-800-440-6723

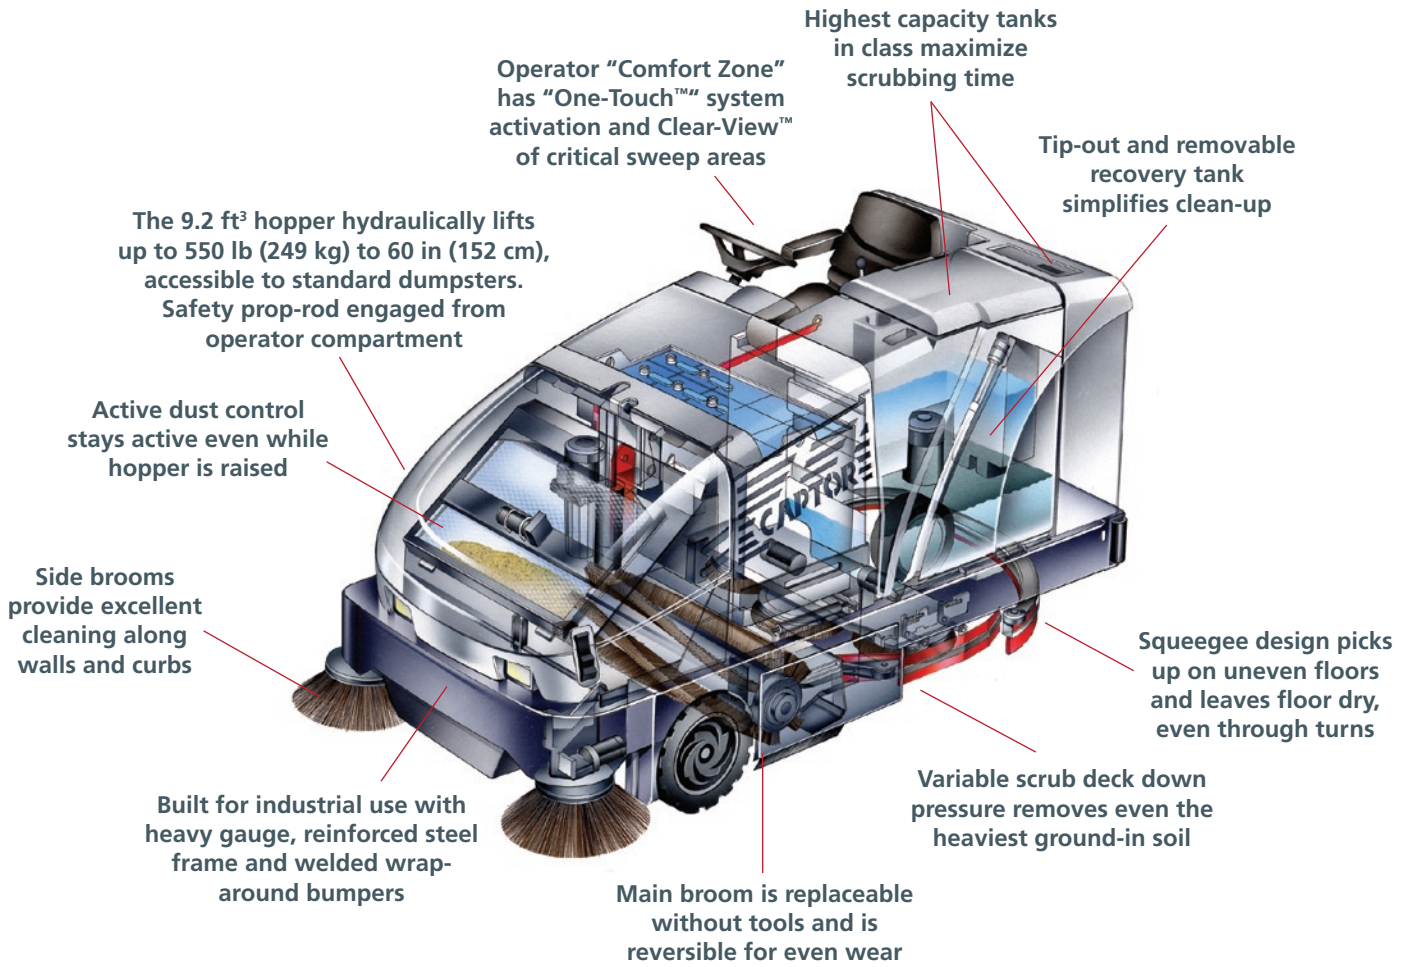

## GAIN PRODUCTIVITY WITH ADVANCE CAPTOR®

(Captor® Sweeper-Scrubber vs. Sweeping and Scrubbing)

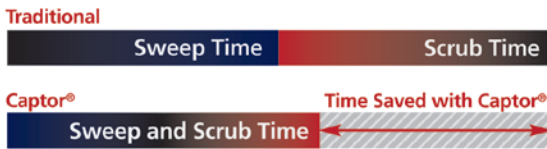

The multi-tasking Advance Captor® cleans nearly twice as fast compared to a separate sweeper and scrubber required to do the same amount of cleaning. This is because the Captor can both sweep and scrub in a single pass. The result is an increase in productivity and savings to your bottom line.



Battery roll-out functionality is standard on the Captor®, enabling it to run continuously. Complete battery exchange solutions available through Advance.



The ergonomic Clear-View™ design provides the operator with an unobstructed view of critical sweep zones.



Captor® AXP™ allows control of detergent usage and the ability to use your choice of detergent.



The Tip-out recovery tank makes equipment clean-up safe and simple and helps keep your recovery tank fresh.

# Captor® & Captor® AXP™ 4300B & 4800B

## Battery Rider Sweeper–Scrubbers

### Superior Cleaning Results and Increased Productivity.

The Advance Battery Captor® sweeper–scrubber is best-in-class when it comes to value, productivity and cleaning results. The modular Captor platform consists of a high performance sweeping system with dust control and high dump hopper, and a scrub deck that can be sized to match the facility. It can operate as a stand-alone sweeper, scrubber or as a highly productive combination sweeper–scrubber. The Battery Captor provides the productivity of an engine machine without the noise, maintenance costs and fumes. Standard on the Battery Captor is a battery roll-out system, allowing continuous cleaning.

The Captor 4800B has been designed with the largest-in-class 80 gallon tanks and 9.2 ft<sup>3</sup> hopper. This results in more time cleaning and less time dumping and refilling. And because the Captor can sweep and scrub in a single pass, it does the work of two machines with one operator.

The Captor delivers superior cleaning results! The sweeper system provides the largest available main broom for its size, for better sweeping and dust control. The dust control system stays active even while the hopper is raised for dumping. The variable scrubbing down pressure of up to 400 lb allows the Captor to remove heavy dirt buildup. The vacuum recovery system leaves floors clean, dry and ready for immediate use. With the Captor's side squeegees, the floor is left dry even on sharp turns.

Select the scrub deck size that best meets your needs. The Captor has a 51 inch or 62 inch sweep path with optional 43 inch or 48 inch scrub decks.

**The Captor® AXP™** scrubber includes all of the features found on the standard Captor model with the added advantage of AXP Onboard Detergent Dispensing System. The AXP system increases operator productivity by taking the guesswork out of how much detergent to use. You simply set the AXP rate selector according to manufacturer's recommended dilution rate and you are ready to clean. Plus, you can use any detergent, including those that are green-certified, so there is no need to change your detergent or cleaning routine when using the Captor AXP.

In keeping with the Total Clean® philosophy, the Captor rider scrubber allows complete and easy access to all machine components for cleaning and maintenance. Total Clean features mean lower cost of ownership and increased productivity to drive down the total cost of cleaning.

**For Superior productivity and cleaning results, the Advance Battery Captor delivers.**

### *Ideal applications include:*

- Warehouse/Distribution
- Manufacturing
- Parking Garages and Ramps
- Food and Beverage
- Transportation Facilities
- Stadiums and Arenas
- Municipalities

### FEATURES AND BENEFITS

**"One-Touch™" electronic function controls are conveniently located to keep operation simple and safe.**

**Rugged construction with durable components assures years of reliable performance.**

**Designed to be easy to maintain with open access to all critical systems.**

**Quiet, emissions and order-free operation.**



Technical Specifications		
Models	Captor® 4300	Captor® 4800
Sweeping Path	51 in (130 cm) (single side broom) Squeegee scrub path is fully swept.	62 in (158 cm) (dual side brooms) Squeegee scrub path is fully swept.
Main Broom	40 in (102 cm) length x 14 in (36 cm) diameter – BOTH MODELS	
Scrubbing Paths and Brushes	43 in (110 cm); Scrub Brushes 3 x 15 in (38 cm)	48 in (122 cm); Scrub Brushes 3 x 17 in (43 cm)
Sweeping Coverage Rates Per Hour	134,600 ft <sup>2</sup> (12,500 m <sup>2</sup> ) (single side broom)	163,700 ft <sup>2</sup> (15,210 m <sup>2</sup> ) (dual side brooms)
Scrubbing Coverage Rates Per Hour	75,700 ft <sup>2</sup> (7,030 m <sup>2</sup> )	84,500 ft <sup>2</sup> (7,850 m <sup>2</sup> )
Variable Scrub Pressure	Three scrub deck down pressure settings up to 400 lb (181 kg)	
Transport Speed	5.5 miles per hour (8.9 kph)	
Motors	Propulsion 5 hp, Scrubbing 1.5 hp (3), Sweeping 2 hp – BOTH MODELS	
Minimum Turn-around Aisle Width	118 in (300 cm) both left and right – BOTH MODELS	
Solution Tank Capacity	60 gal (227 L)	80 gal (303 L)
Recovery Tank Capacity	60 gal (227 L)	80 gal (303 L)
Recovery System	Dual vacuum capable of 70 in waterlift – BOTH MODELS	
Battery Capacity	Available with battery up to 770 Ah. Unit comes standard with roll-out capability. – BOTH MODELS	
Electric and Hydraulic System	Systems are electric powered with circuit overload protection with the exception of the hopper lift system which uses a hydraulic power unit.	
Ramp Climbing	12 deg max (7.5 deg while scrubbing)	
Hopper	9.2 ft <sup>3</sup> (261 L) with 550 lb (250 kg) load capacity – BOTH MODELS	
High Dump	Variable to 60 in (152 cm)	
Dust Control	78 ft <sup>2</sup> (7.25 m <sup>2</sup> ) pleated panel filter captures dust. Timed electric filter shaker standard.	
Squeegee	Four-sided, wrap-around design leaves floor dry, even on tight turns. Automatically lifts in reverse. Linotex is the standard material with other options available.	
Machine Dimensions	105 in (267 cm) length x 50 in (127 cm) width x 59 in (150 cm) height (79 in with overhead guard) (width is for chassis without squeegee)	
Maximum Battery Dimensions	18 in (457 mm) wide x 38.7 in (983 mm) long x 23 in (584 mm) high. Battery must not exceed 1,838 lb (834 kg)	
Weight	Machine only: 3,200 lb, 770 Ah battery: 1,838 lb, 80 gal full solution tank: 667 lb Total Max weight: 5,702 lb – BOTH MODELS	

Specifications are subject to change without notice.



## Captor® & Captor® AXP™ 4300B & 4800B

Industrial Sweeper-Scrubber Takes Productivity and Value to a Whole New Level.

### The Battery Advantage

- Quiet operation
- Odor and emissions-free
- No combustible fuel handling issues
- Reduced maintenance
- Continuous run time with roll-out battery exchange system.

### Optional Accessories:

- Overhead guard and roller bumpers
  - Side broom guards
  - Deluxe suspension seat and seat belt
  - Fire extinguisher
  - Hopper thermal sensor
  - Various brooms, brushes and squeegees
  - Warning beacon
  - Off-aisle vacuum wand
  - Dust filter plugged indication
  - Battery transfer cart and charging station
- And many others*

Ask about our leasing options.

©2009 Nilfisk-Advance, Inc. Form L1547A 10-1-09



[www.southeasternequipment.net](http://www.southeasternequipment.net)

1-800-440-6723