

# Advance ConvertaMAX<sup>®</sup> 20 & 26

Walk-Behind Automatic Scrubbers



DEFINING  
CLEANING  
INNOVATION



Scrubbers built to last,  
only from Advance

 **Advance**  
*by Nilfisk-Advance*

**Southeastern**  
EQUIPMENT & SUPPLY, INC.

**800.440.6723**  
[www.southeasternequipment.net](http://www.southeasternequipment.net)



# Advance ConvertaMAX® 20 & 26

## Walk-Behind Automatic Scrubbers

**Scrub Through Standard Doorways  
While Leaving a Clean, Dry Path for  
Convenient, High-production Cleaning.**

The Advance ConvertaMAX® automatic scrubbers combine the best features of scrubber technology in both 20 and 26 inch (51 and 66 cm) scrub path sizes.

Innovative features include a simple, ergonomic handle bar and control panel for all scrub functions. And convenience features, like the rear solution tank port that permits filling the solution tank while dumping the recovery tank to save time; the easy-to-read solution level sight gauge, that tells how much solution is left in the tank; and hands-off brush mounting and removal to avoid getting down and reaching under a machine. All these features help save time with set-up, clean-up and production time.


The scrub brush(es) float over uneven floors, and are gear-driven for optimum scrubbing speed and torque. Maneuvering is a breeze with the center drive wheel that can pivot on corners while the squeegee follows the scrub path.

Advance ConvertaMAX® scrubbers have the durability the Advance brand is known for. You can depend on these scrubbers being productive for a long time.

Simple controls, center drive wheel and low profile make the ConvertaMAX® scrubbers easy to maneuver in congested areas.

### Ideal Applications Include —

- Hospitals/Healthcare Facilities
- Schools and Universities
- Government Buildings and Installations
- Supermarkets
- Shopping Malls
- Warehouses
- Distribution Centers
- Retail Stores
- Airports



VALUE FEATURES



Rear solution fill port lets the operator fill the solution tank while emptying the recovery tank for faster cycle times and better productivity.



One-Touch™ electronic function controls are conveniently located to keep operation simple and safe.




Easy access to batteries and other components assures minimal down time.



Rugged construction with durable components assures years of reliable performance.



Low sound level permits operation anywhere, anytime.

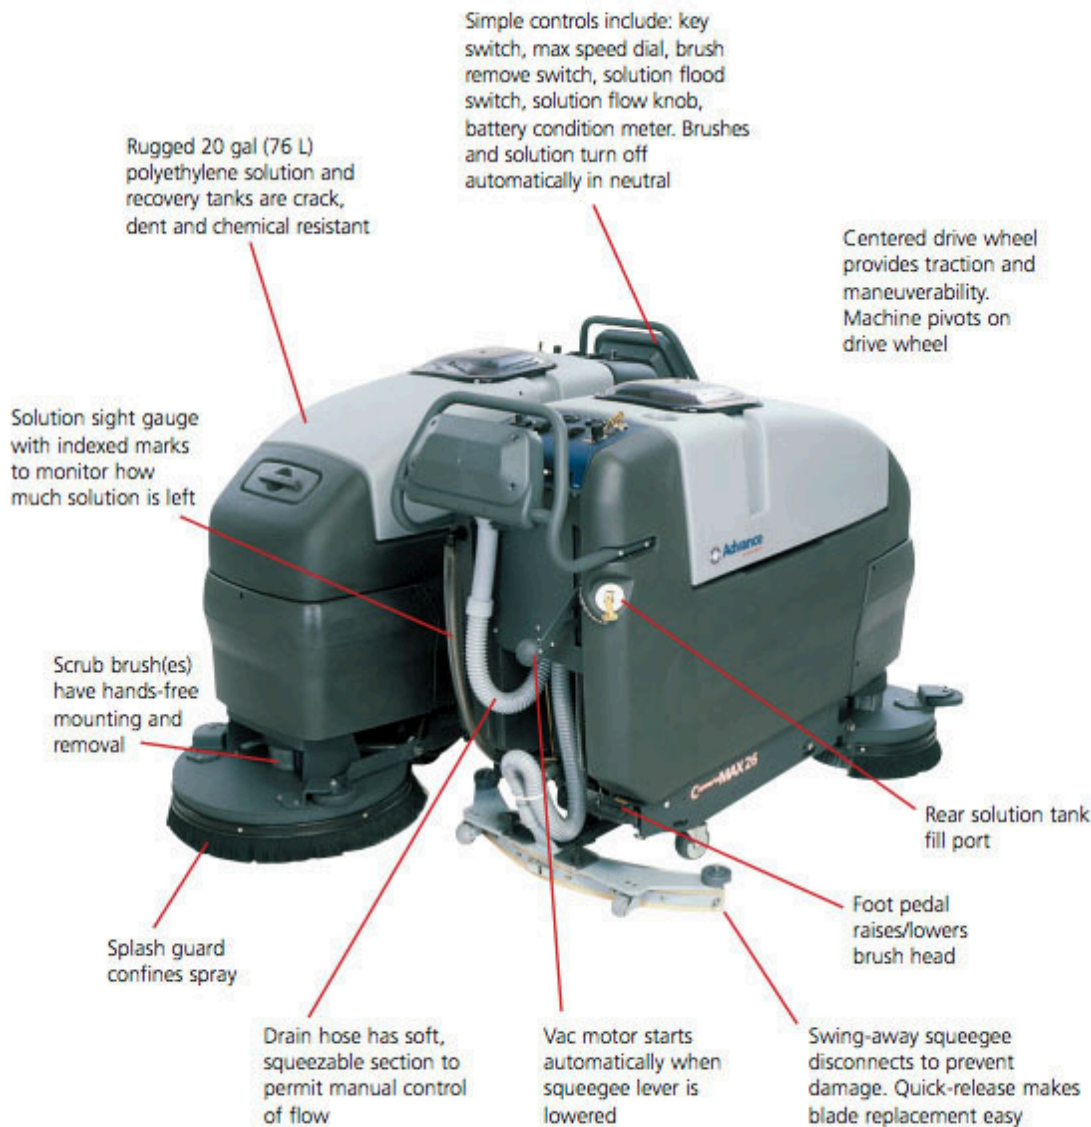

Ergonomic handle design with integrated variable speed control gives optimal, comfortable control.



Front solution fill opening prevents solution splashing out during use or abrupt stops.



The recovery tank is fitted with a float system that shuts off vacuum air flow when the tank is full to prevent overflow. Large opening permits easy, unobstructed cleanout.



Battery compartment features a channel that directs spilled water to a convenient drain hose for easy cleanup.



Hinged recovery tank with safety latch gives easy maintenance access. Vac motor has sound deadening for quiet operation.

VALUE FEATURES

*The Advance ConvertaMAX<sup>®</sup>, designed with Total Clean<sup>™</sup> Technology, is very comfortable and safe to use — by design. The result is increased productivity. The Advance ConvertaMAX<sup>®</sup> is also designed with features to make it easy to clean up and maintain after cleaning. That reduces the total cost of ownership and drives down the cost of cleaning.*





## Advance ConvertaMAX® Maintenance

ConvertaMAX® 20 and 26 are designed to be service friendly.

Brush motors are protected by an impact-resistant shroud which can be easily removed for service access.

The hinged recovery tank tips aside to give access to the battery compartment and vacuum motor.

A rear electrical access panel can be easily removed for service.

### Defining Cleaning Innovation...

- Our products are designed using innovative technology that increases productivity and drives down the cost to clean.
- You can get expert service and maintenance for your products by factory-trained personnel around the world, as well as fast parts delivery.
- Maintain peak performance with genuine APA parts.




### Optional Accessories

- Full Range of Brushes and Pad Holders for Light to Aggressive Scrubbing
- Oil-resistant Squeegee Blades
- Scrub & Vac™ Kit
- Bristle Deck Skirts
- Hour Meter

### Technical Specifications

	ConvertaMAX® 20	ConvertaMAX® 26
<b>Cleaning Width</b>	20 in (51 cm)	26 in (66 cm)
<b>Cleaning Rate</b>	26,500 ft <sup>2</sup> (2,462 m <sup>2</sup> ) per hour	34,500 ft <sup>2</sup> (3,205 m <sup>2</sup> ) per hour
<b>Solution Tank</b>	20 gal (76 L) capacity, roto-molded polyethylene, w/drain hose	20 gal (76 L) capacity, roto-molded polyethylene, w/drain hose
<b>Solution Feed System</b>	Electric solenoid valve for on/off control, manual ball valve for flow control. Max 0.8 gal/min (3 L/min) flow rate	Electric solenoid valve for on/off control, manual ball valve for flow control. Max 0.8 gal/min (3 L/min) flow rate
<b>Recovery Tank</b>	20 gal (76 L) capacity, roto-molded polyethylene, equipped with ball-float vacuum air shut-off. 31 in (79 cm) long 1.5 in (38 mm) diameter drain hose	20 gal (76 L) capacity, roto-molded polyethylene, equipped with ball-float vacuum air shut-off. 31 in (79 cm) long 1.5 in (38 mm) diameter drain hose
<b>Scrub Brushes</b>	One 20 in (51 cm) diameter disc brush or pad holder	Two 13 in (36 cm) diameter disc brushes or pad holders
<b>Brush Speed</b>	200 rpm	220 rpm
<b>Brush Pressure</b>	Low – 45 lb (20 kg) High – 80 lb (36 kg)	Low – 70 lb (32 kg) High – 110 lb (50 kg)
<b>Squeegee</b>	30.5 in (78 cm) w/four-sided wiping blades	36.25 in (92 cm) w/four-sided wiping blades
<b>Brush Drive Motor(s)</b>	One 1 hp, 746 W motor	Two 0.75 hp, 560 W motors
<b>Vacuum Motor</b>	0.75 hp, 570 W, three-stage	0.75 hp, 570 W, three-stage
<b>Drive System</b>	0.5 hp, 373 W motor. Variable speeds forward & reverse. Up to 265 ft/min (81 m/min) scrubbing, 290 ft/min (88 m/min) transport	0.5 hp, 373 W motor. Variable speeds forward & reverse. Up to 265 ft/min (81 m/min) scrubbing, 290 ft/min (88 m/min) transport
<b>Power Source</b>	Four 6 V/238 Ah batteries (standard)	Four 6 V/238 Ah batteries (standard)
<b>Construction</b>	Solid 10-gauge unitized steel frame is zinc-plated, yellow chromated and painted to resist rust.	Solid 10-gauge unitized steel frame is zinc-plated, yellow chromated and painted to resist rust.
<b>Weight</b>	626 lb (284 kg) w/238 Ah batteries 362 lb (164 kg) without batteries 413 lb (187 kg) shipping, (machine only)	648 lb (294 kg) w/238 Ah batteries 384 lb (174 kg) without batteries 439 lb (199 kg) shipping, (machine only)
<b>Part Numbers</b>	56 397 175	56 397 176 56 397 231

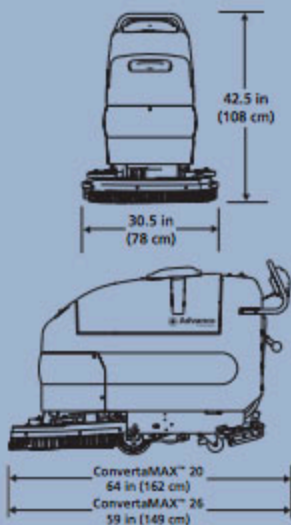

Specifications are subject to change without notice.



**Advance**  
by Nilfisk-Advance

**Southeastern**  
EQUIPMENT & SUPPLY, INC.

**800.440.6723**

[www.southeasternequipment.net](http://www.southeasternequipment.net)