



Pony 20 SCA

Automatic Carpet Extractor



A large 20-gallon capacity and 22-inch power brush make the self-propelled Pony 20 SCA carpet extractor perfect for wide-open, carpeted areas.

- n With its 3-stage vacuum motor and 100 PSI bypass-type solution pump, the Pony has the power to blast solution into the nap and the suction to remove carpet dirt in a single pass.
- n The variable-speed drive motor allows the operator to match working speed to carpet conditions. Compared to a box extractor, The Pony 20 SCA cleans carpet in half the time and is less fatiguing to operate.
- n A built-in spray wand makes pre-cleaning spots and high traffic areas quick and easy.
- n The spring-loaded brush housing, with quick quarter-turn removable nozzles, is offset to clean up to the baseboard. A floating brush and lock-down swinging vacuum shoe assure the Pony 20 SCA provides aggressive cleaning performance while minimizing drying time.
- n Built for the rigors of heavy-duty commercial use, the Pony features a flap-type float shut-off, hinged polyethylene body, and a welded steel base.

NSS Enterprises, Inc.
3115 Frenchmens Road
Toledo, Ohio 43607-2958
USA
www.nss.com




Pony 20 SCA Specifications

Tank Capacity -Solution -Recovery	20 gal. (76 l.) w/solution level indicator 20 gal. (76 l.)	Construction -Tanks -Base -Housing -Spray Jets	Rotocast polyethylene Steel welded Mounted on hinges 5 stainless steel snap-in jets on removable bar	Cord -Size -Length	12-3 SJT, detachable with twist lock plug 75 ft.
Solution Pump -Type -Voltage	100 PSI, bypass 115V (240V available)	-Wheels	Two 8 in. (20cm) roller bearing type w/grooved non-marking rubber tread	Sound Level	75 dbA @ operator
Vacuum Motor -Type -Voltage -HP -Closed Waterlift	3-stage, bypass 115V 1.75 HP 125 in.	-Casters	Two rear 4 in. (10 cm) ball bearing swivel type casters	Accessory Valve	Quick couple type, all brass
Drive Motor -Type -Voltage	.05 HP, variable speed 115V, (240V available)	-Vacuum Shoe	Cast aluminum w/steel plate cover and quick-disconnect; floats and swings	Drain Mechanism	Dump hoses on solution and recovery tanks
Current	15 amps	Bottle Holder	Molded, holds 2 bottles	Float Shut-Off	Flap type
Brush Motor -Type -Voltage -HP -RPM	Permanent magnet 115V (240V available) .25 HP 2100	Accessory Spray Wand	Built-in; wand holder at the back of machine	Dimensions -Height -Length -Width	41 in. (104 cm) 47 in. (119 cm) 23.5 in. (60 cm)
		Brush	22 in. (56 cm) cylindrical	Weight -Machine -Shipping	165 lbs. (75 kg) 204 lbs. (93 kg)
		Brush Housing	2-piece, allows easy access to brush motor and brush	Warranty	3 year limited 10 year poly parts
Productivity — The Pony 20 SCA covers 4,183 sq. ft. per hour. (Floor coverage figures taken from <i>ISSA 447 Cleaning Times</i> .)					



Quick disconnect spray bar slides out easily when the spray jets need to be flushed.



Hinged body allows access to the internal components of the machine.




Hand tools and hoses are available for stairs and upholstery.

1 The clear dome allows viewing the reclaimed liquid.

2 The tank-over-tank design of the Pony 20 SCA improves sight lines and keeps the machine balanced from job start to finish.

3 Cast aluminum vacuum shoe floats on the carpet surface. It swings on turns to ensure maximum vacuum coverage of the scrub path.

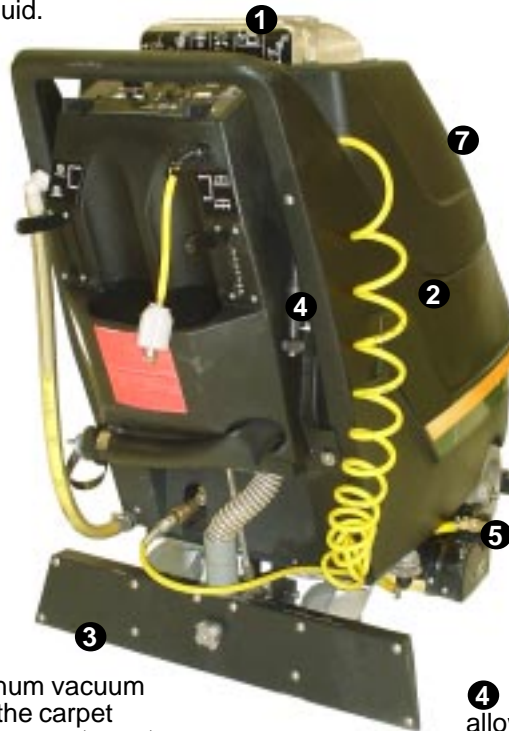

7 Durable 20-gallon (76 l.) polyethylene tanks do not rust or corrode; they're warranted for 10 years.

6 The non-marking guide wheel lets the operator extract carpeting right up to the wall.

6

5 Spring-loaded brush head is offset to clean right to the wall.

5

4 Built-in spray wand allows the operator to pre-treat high traffic areas.

4

DISTRIBUTED BY



NSS® Enterprises, Inc.
3115 Frenchmens Road
Toledo, Ohio 43607-2958 USA
419/531-2121 or 800/677-1663
Fax 419/531-3761
www.nss.com
mailus@nss.com
Specifications and appearance
subject to change without notice.

Printed in USA

©2005 NSS Enterprises, Inc.

#9094901 REV B 7/05