

T3



## Walk-behind Floor Scrubber

- Just-scrubbed floors immediately dry and safe for traffic with FaST™
- 75% lower sound level (68.5 dBa)
- Easily cleanable, sanitary Hygenic™ solution and recovery tanks



**FaST**  
Foam Scrubbing Technology

The Safe Scrubbing Alternative®

## A high-performance scrubber to match your higher standards.

The new T3 scrubber delivers an advanced state of safety and cleanliness with award-winning FaST technology and a sound level 75% quieter than leading competitive models.

### CREATE A CLEAN, SAFE AND HEALTHY ENVIRONMENT

#### Improve environmental health in your facility

Exclusive Hygenic tanks allow for easy access and sanitization, reducing mold, bacteria and other contaminants that can grow in enclosed tanks.

#### Quietly clean in noise-sensitive environments

At only 68.5 decibels, the T3 is 75% quieter than leading competitive models – comparable to normal conversation levels.

#### Leave behind no cleaning solution

Even around 180-degree turns, the T3's equal-pressure, parabolic squeegee recovers all cleaning solution from the floor.



### NFSI-CERTIFIED FaST: THE SAFE SCRUBBING ALTERNATIVE®

Equip your T3 with optional FaST (Foam-activated Scrubbing Technology) – the first and only automatic scrubbing system to receive high-traction certification from the National Floor Safety Institute. With T3 and FaST:

Just-scrubbed floors are dry and safe to walk on immediately because FaST eliminates slippery chemical residue;

Operators are safer – they never handle chemicals thanks to the FaST-PAK™ detergent cartridge;

Use only the detergent you need. FaST accurately measures detergent and water, reducing waste and eliminating chemical residue;

Supercharge your productivity with fewer dump/fill cycles – with FaST, the T3 uses only 1 tablespoon of water to clean more than 10.75 ft<sup>2</sup>.




### ENGINEERED FOR SAFETY

**Minimize the risk of slip-and-fall injuries and help control insurance costs.** Floors are clean, dry and safe for foot traffic almost immediately when scrubbed with FaST.

**Reduce operator fatigue and increase productivity.** Ergonomic design makes cleaning with the T3 more comfortable for your staff.

**Increase scrubbing effectiveness and quality.** Clear sight lines and simple controls mean operators can focus solely on their cleaning environment.

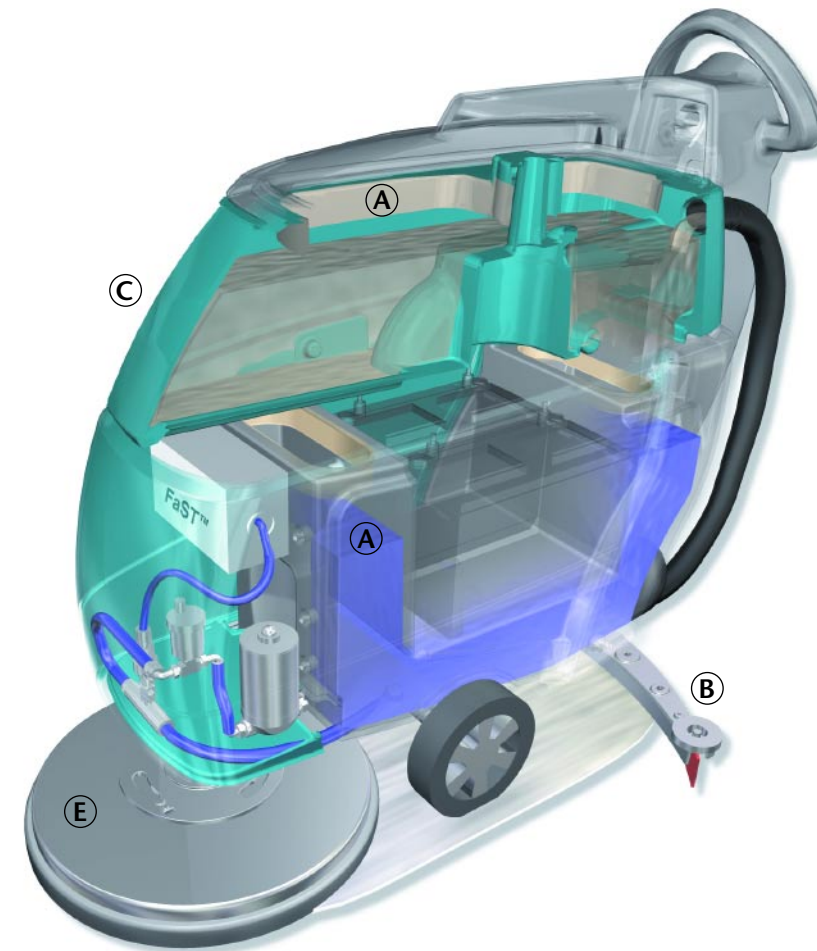

- A Solution and recovery tanks are easily cleanable.** Exclusive Hygenic tanks are fully accessible for sanitization.
- B Quickly remove and replace brushes and squeegees** without tools.
- C Clean tight spaces and narrow aisles** with T3's compact design and highly maneuverable handling.
- D Easily train new operators** to use the simple, intuitive control panel.
- E Operate in noise-sensitive environments.** T3 is a quiet 68.5 decibels.







## FaST-PAK™ CLEANING CONCENTRATE

Easy-to-handle FaST-PAK cartridges are safe to use on a variety of floors, effectively cleaning light-to-heavy soils and grease.

Available in FaST 365 concentrate or 665 heavy duty cleaner/degreaser.

### Tested Safe for Floor Finishes

The nationally-recognized independent testing laboratory, ASPEN, determined that FaST:

- Performs as well as or better than conventional scrubbing;
- Effects on finish gloss are the same as conventional scrubbing.

For a copy of test results, please call toll-free 800.553.8033.



FaST is the first and only automatic cleaning system certified by the NFSI to dramatically improve overall floor traction by up to 21%.

## T3 WALK-BEHIND FLOOR SCRUBBER

| FEATURES                                      | T3 17-inch Pad Assist   | T3 20-inch Pad Assist (20-inch w/Drive)   |
|---|---|---|
| <b>Productivity (per hour)</b>                |   |   |
| Theoretical Max                               | 20,230 ft <sup>2</sup> /1,880 m <sup>2</sup>  | 23,800 ft <sup>2</sup> /2,210 m <sup>2</sup>  |
| Estimated Coverage* (Conventional)            | 8,440 ft <sup>2</sup> /785 m <sup>2</sup>   | 10,125 ft <sup>2</sup> /940 m <sup>2</sup><br>(16,065 ft <sup>2</sup> /1,490 m <sup>2</sup> )   |
| Estimated Coverage* (FaST)                    | 11,250 ft <sup>2</sup> /1,045 m <sup>2</sup>  | 13,500 ft <sup>2</sup> /1,255 m <sup>2</sup><br>(21,420 ft <sup>2</sup> /1,990 m <sup>2</sup> ) |
| <b>Brush/Pad Drive System</b>                 |   |   |
| Cleaning path                                 | 17 in/43 cm   | 20 in/50 cm   |
| Brush motor horsepower                        | 0.75 hp   | 0.75 hp   |
| Brush RPM                                     | 240 RPM @ 40 lbs pressure   | 240 RPM @ 40 lbs pressure   |
| Brush/pad pressure                            | 45 lbs & 70 lbs   | 45 lbs & 70 lbs   |
| <b>Solution Delivery System</b>               |   |   |
| Solution tank description                     | Full access & cleanable   | Full access & cleanable   |
| Solution capacity                             | 10.5 gal/40 L   | 10.5 gal/40 L   |
| <b>Recovery System</b>                        |   |   |
| Recovery tank description                     | Full access & cleanable   | Full access & cleanable   |
| Recovery tank capacity                        | 10.5 gal/40 L   | 10.5 gal/40 L   |
| Vacuum motor                                  | 0.5 hp – two stage  | 0.5 hp – two stage  |
| Vac motor CFM                                 | 65 cfm/1.84 cmm   | 65 cfm/1.84 cmm   |
| Vac motor sealed waterlift                    | 40 in/102 cm  | 40 in/102 cm  |
| <b>Battery System</b>                         |   |   |
| System voltage                                | 24 volt   | 24 volt   |
| Battery amp hour rating                       | 105 AH @ 20 hr  | 130 AH @ 20 hr<br>(155 AH @ 20 hr)  |
| Battery run time (continuous cleaning rating) | 2.5 hours   | 2.5 hours (3 hours)   |
| <b>Dimensions/Weights</b>                     |   |   |
| Product height                                | 43-in/109 cm  | 43 in/109 cm  |
| Product length                                | 48 in/123 cm  | 50.25 in/128 cm   |
| Product width (with squeegee)                 | 30 in/76 cm   | 30 in/76 cm   |
| Product weight (with batteries)               | 319 lbs/145 kg  | 343 lbs/156 kg<br>(391 lbs/177 kg)  |
| <b>Total Power Consumption</b>                |   |   |
| Power consumption amps                        | 27 amp nominal  | 29 amp nominal<br>(30 amp nominal)  |
| <b>Decibel Rating</b>                         |   |   |
| Operator's position                           | 68.5 dBa  | 68.5 dBa  |
| <b>Warranty</b>                               |   |   |
| 10/3/3  | A minimum of ten (10) years on rotationally molded polyethylene housings and parts free from defects and workmanship under normal use and service. The non-polyethylene parts a three (3) year—or 2,500 hours of operation—warranty under normal use and service. On-site service labor coverage of warranty items for three (3) years. |   |

\*Estimated coverage rates use the practical speed and empty/fill time standards from the 2004 ISSA Cleaning Times handbook.

## SEEING IS BELIEVING

See for yourself how the T3 scrubber can help you reach a higher standard of cleanliness and safety in your facility. For a demonstration or additional information, call 800.553.8033.

**Southeastern**  
EQUIPMENT & SUPPLY, INC.

**800.440.6723**

[www.southeasternequipment.net](http://www.southeasternequipment.net)