

8410 Sweeper/Scrubber



Working for a cleaner, safer world.



800.440.6723 www.southeasternequipment.net

- ✓ Impressive sweeping
- ✓ Outstanding scrubbing
- Exceptional quality
- ✓ In one machine

The Tennant Model 8410 offers the latest technology in both sweeping and scrubbing. And puts them together in one state-of-the-art sweeper/scrubber. What's more, it is built by Tennant, world renowned for quality floor maintenance products.


The 8410 gives unsurpassed sweeping in nearly any application. Direct-throw sweeping combines with a II-Speed cleaning system to pick up a range of debris from dust and sand to metal or wood chips, even light, bulky litter.

Impressive scrubbing is the product of aggressive brush action and a high volume pick up system that leaves floors clean and ready for traffic.




The 8410 delivers excellent water control, even on turns. It both scrubs and sweeps right up to walls, pallets and edges. The machine leaves unstreaked floors that are free of dirt and debris.

In all, the Model 8410 Sweeper/Scrubber is an easy to operate, easy to handle, easy to clean, state-of-the-art machine that greatly increases the productivity of your cleaning operation.



· Edge Cleaning

Unique among sweeper/scrubbers is the positionable scrub head that cleans tight against walls, pallets and machinery. It cleans where other sweeper/ scrubbers can't.

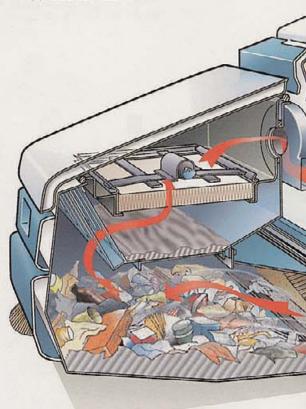



Effective Sweeping

The 8410's II-Speed cleaning system picks up a full range of debris indoors or out. It sweeps a 60 inch (1525 mm) path at rates up to 118,000 sq. ft. (11000 m²) per hour. A standard multi-level dump hopper empties into containers up to 60 inches (1525 mm) in height.

800.440.6723 • www.southeasternequipment.net



· Easy Clean Out


Easy access allows fast, thorough tank clean out. Hoses are protected inside tanks and pull out for easy drainage.

· No Streaking

The sweeping system removes debris that can cause squeegee streaking. A separate fan and specially designed pick up system remove solution from floors, cracks.

Reduced Spillage On Turns

An innovative swing squeegee tracks the scrub path on turns to contain solution spillage.





• Fast Maintenance

Brushes and squeegee change quickly, without tools.



Durability

Dependability comes from premium quality hydraulics, powerful engine, non-rusting durable scrubber tanks, wrap-around bumper, reinforced frame and more.



· Easy Operation

Single buttons control sweeping and scrubbing functions to simplify operation.



Comfort Control

Power steering, tilt-steering wheel, a low-force drive pedal and roomy operator's compartment increase operator comfort.

800.440.6723 • www.southeasternequipment.net

PRODUCTIVITY ENHANCEMENTS



· 4 Hours of Continual Cleaning

Eliminate unproductive tank refilling with the ES feature. With ES, you can continuously clean for up to 4 hours. This means the area cleaned on one fill is up to 360% greater.



· Clean Hard-to-Reach Areas

Use the optional squeegee wand to increase your productivity and broaden your coverage. Pick up spills from under racks and other places scrubbers cannot access.

CERTIFIED ISO 9001

Symbolizing our commitment to excellence in design, production, installation and service, Tennant has been awarded the ISO 9001 certificate.

SPECIFICATIONS'

				Scrubbing system				
117	in	2970	mm	Scrubbing path:	48	in	1220	mm
63.5	in	1610	mm	Solution tank:	60	gal	227	L
61	in	1550	mm	Recovery tank:	60	-	227	L
: 83.7	in	2125	mm	Side shift:	6		155	mm
4,750	lb	2157	kg					
				Power system				
				12-11-11-11-11-11-11-11-11-11-11-11-11-1	63	hp	47	kW
60	in	1525	mm		49	hp	36.5	kW
45	in	1145	mm					
23	in	585	mm	Optional equipment				
14	ft3	400	L	Overhead guard	Light packages			
1,200	lb	545	kg		Squeegee wand			
74	ft ²	6.9	m ²	Seat belts	Fire extinguisher			
				Audio-visual back-up alarm	o-visual back-up alarm Positive drain cont		control	
						Autofill	(with E	S)
8	mph	12.9	km/h					
3		4.8	km/h					
						_		
14.1	%	8	dea	* Subject to change with	out r	otice		
10.5	%	6	deg					
	63.5 61 : 83.7 4,750 60 45 23 14 1,200 74 8 3	60 in 4,750 lb 60 in 45 in 23 in 14 ft ³ 1,200 lb 74 ft ²	63.5 in 1610 61 in 1550 : 83.7 in 2125 4,750 lb 2157 60 in 1525 45 in 1145 23 in 585 14 ft ³ 400 1,200 lb 545 74 ft ² 6.9 8 mph 12.9 3 mph 4.8	63.5 in 1610 mm 61 in 1550 mm 183.7 in 2125 mm 4,750 lb 2157 kg 60 in 1525 mm 45 in 1145 mm 23 in 585 mm 14 ft³ 400 L 1,200 lb 545 kg 74 ft² 6.9 m² 8 mph 12.9 km/h 3 mph 4.8 km/h 14.1 % 8 deg	117 in 2970 mm Scrubbing path: 63.5 in 1610 mm Solution tank: 61 in 1550 mm Recovery tank: : 83.7 in 2125 mm Side shift: 4,750 lb 2157 kg Power system Engine-gasoline/LPG: Engine-diesel: 60 in 1525 mm Engine-diesel: 45 in 1145 mm 23 in 585 mm Optional equipment 14 ft3 400 L 1,200 lb 545 kg ES (Extended Scrubbing) 74 ft2 6.9 m2 Seat belts Audio-visual back-up alarm Spark arresting muffler 8 mph 12.9 km/h 3 mph 4.8 km/h 14.1 % 8 deg *Subject to change wither	117 in 2970 mm Scrubbing path: 48 63.5 in 1610 mm Solution tank: 60 61 in 1550 mm Recovery tank: 60 : 83.7 in 2125 mm Side shift: 6 4,750 lb 2157 kg Power system Engine-gasoline/LPG: 63 Engine-diesel: 49 45 in 1145 mm 23 in 585 mm Optional equipment 14 ft3 400 L 1,200 lb 545 kg ES (Extended Scrubbing) 74 ft2 6.9 m² Seat belts Audio-visual back-up alarm Spark arresting muffler 8 mph 12.9 km/h 3 mph 4.8 km/h 14.1 % 8 deg * Subject to change without residual contents of the contents of t	117 in 2970 mm Scrubbing path: 48 in 63.5 in 1610 mm Solution tank: 60 gal 61 in 1550 mm Recovery tank: 60 gal 83.7 in 2125 mm Side shift: 6 in 4,750 lb 2157 kg Power system Engine-gasoline/LPG: 63 hp Engine-diesel: 49 hp 45 in 1145 mm 23 in 585 mm Optional equipment 14 ft3 400 L Overhead guard Light p 1,200 lb 545 kg Es (Extended Scrubbing) Squeet 74 ft2 6.9 m² Seat belts Fire ex Audio-visual back-up alarm Positive Spark arresting muffler Autofill 8 mph 12.9 km/h 3 mph 4.8 km/h 14.1 % 8 deg *Subject to change without notice*	117 in 2970 mm Scrubbing path: 48 in 1220 63.5 in 1610 mm Solution tank: 60 gal 227 61 in 1550 mm Recovery tank: 60 gal 227 83.7 in 2125 mm Side shift: 6 in 155 4,750 lb 2157 kg Power system Engine-gasoline/LPG: 63 hp 47 Engine-diesel: 49 hp 36.5 45 in 1145 mm 23 in 585 mm Optional equipment 14 ft³ 400 L Overhead guard Light packages 1,200 lb 545 kg ES (Extended Scrubbing) Squeegee war 74 ft² 6.9 m² Seat belts Fire extinguish Audio-visual back-up alarm Positive drain of Spark arresting muffler Autofill (with Esteroic Control of Spark arresting muffler) 8 mph 12.9 km/h 3 mph 4.8 km/h 14.1 % 8 deg *Subject to change without notice.

Copyright^o 1996, Tennant 12/96 (20M) Printed in USA (GS) (DPI) ES, II-Speed, and Thermo-Sentry are trademarks registered in the United States

Item #07208 / Mat'l #899049



800.440.6723



